

Scope of Registration

Dixon Group Canada Limited – Boss Fittings

Design Code: ASME B31.3

Design Temperature: 450 °F

Design Pressure: 600 Psi

THIS IS PART OF
CRN 0118977.5
 Technical Standards & Safety Authority
 Boilers & Pressure Vessels
 Safety Program

Z. G. 11/20/16

Product No.	Description	Material
GBC	Female spud	ASTM A108
GCC	Female spud	ASTM A108
GB3	Female spud	ASTM A108
GB8	Female spud	ASTM A108
GB13	Female spud	ASTM A108
GB18	Female spud	32510 ASTM A47; ASTM A536
GB23	Female spud	32510 ASTM A47; ASTM A536
GB28	Female spud	32510 ASTM A47; ASTM A536
GB33	Female spud	32510 ASTM A47; ASTM A536
GB38	Female spud	32510 ASTM A47; ASTM A536
GB48	Female spud	32510 ASTM A47
GB68	Female spud	32510 ASTM A47
GMC	Male spud	ASTM A53; ASTM A108
GM3	Male spud	ASTM A108
GM8	Male spud	ASTM A108
GM13	Male spud	ASTM A108
GM18	Male spud	32510 ASTM A47; ASTM A536
GM23	Male spud	32510 ASTM A47; ASTM A536
GM28	Male spud	32510 ASTM A47; ASTM A536
GM33	Male spud	32510 ASTM A47
GM38	Male spud	32510 ASTM A47; ASTM A536
GDB3	Double spud	ASTM A108
GDB13	Double spud	ASTM A108
GDB23	Double spud	32510 ASTM A47; ASTM A536
GDB28	Double spud	32510 ASTM A47; ASTM A536
GDB33	Double spud	32510 ASTM A47
GDB38	Double spud	32510 ASTM A47
GMAS6	Male NPT adapters	ASTM A108; ASTM A513; 32510 ASTM A47; ASTM A536
GMAS11	Male NPT adapters	ASTM A108; ASTM A513; 32510 ASTM A47; ASTM A536
GMAS16	Male NPT adapters	ASTM A108; 32510 ASTM A47; ASTM A536
GMAS21	Male NPT adapters	ASTM A108; ASTM A513; 32510 ASTM A47; ASTM A536
GMAS26	Male NPT adapters	ASTM A519; ASTM A108; ASTM A513; 32510 ASTM A47; ASTM A536
GFAS6	Female NPT adapters	ASTM A108; 32510 ASTM A47; ASTM A536
GFAS11	Female NPT adapters	ASTM A108; 32510 ASTM A47; ASTM A536
GFAS16	Female NPT adapters	ASTM A108; 32510 ASTM A47; ASTM A536
GFAS21	Female NPT adapters	ASTM A108; ASTM A513; 32510 ASTM A47; ASTM A536
GFAS26	Female NPT adapters	ASTM A519; ASTM A108; ASTM A513; 32510 ASTM A47; ASTM A536




D




THIS IS PART OF
CRN OH18977.5
Technical Standards & Safety Authority
Boilers & Pressure Vessels
Safety Program


Z. G. 11/30/16



female spud



male spud

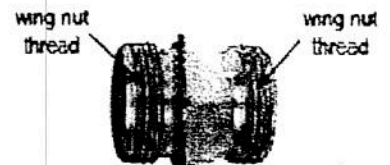

double spud

Thread	Part #	Opt Qty	Part #	Part #
1/4"	GBC	100	---	---
3/8"	GCC	100	GMC	---
1/2"	GB3	100	GM3	GDB3
3/4"	GB8	50	GM8	GDB13
1"	GB13	50	GM13	GDB13
1-1/4"	GB18	25	GM18	GDB23
1-1/2"	GB23	25	GM23	GDB23
2"	GB28	10	GM28	GDB28
2-1/2"	GB33	5	GM33	GDB33
3"	GB38	5	GM38	GDB38
4"	GB48	5	---	---
6"	GB68	2	---	---

1/4", 3/8" and 6" come only with copper seat spuds



A list of products recommended for steam service can be found on page 88



THIS IS PART OF
CRN 0418977.5
Technical Standards & Safety Authority
Boilers & Pressure Vessels
Safety Program

Z. G. 11/30/16

Boss Adapters

These fittings have male or female NPT threads and are designed to fit the standard ground joint spuds on page 93. *Supplied with a wing nut, as shown.* For safety tags and safety tape, see page 921.

Feature:

plated steel and / or iron


male NPT adapters



Size	Part #	Pkg Qty
3/4"	GMAS6	25
1"	GMAS11	25
1 1/4"	GMAS16	10
1 1/2"	GMAS21	10
2"	GMAS26	10

¹ uses a special wing nut, part # B27-3

female NPT adapters



Size	Part #
3/4"	GFAS6
1"	GFAS11
1 1/4"	GFAS16
1 1/2"	GFAS21 ¹
2"	GFAS26

¹ Part is produced as a welded fabrication.